


IP6K9K

I

触点参数 / Contact parameters


	1a			
	≤0.5mΩ (at 300A)			
	300A			
	2×10 ⁻⁵			
	450V型	750V型		
1)	(This area is intentionally obscured in the original document)			
			1200A:30s	
			3000A:0.6s	

1) 23°C, 0.6s:5.4s.
 2) 85°C, 100 mm², " "




性能曲线图 Performance graph

Electrical life curve

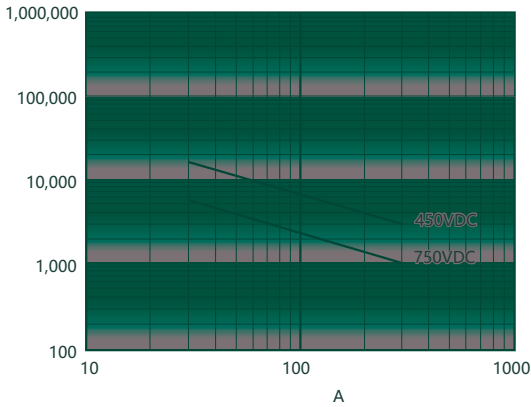

Tolerance curve

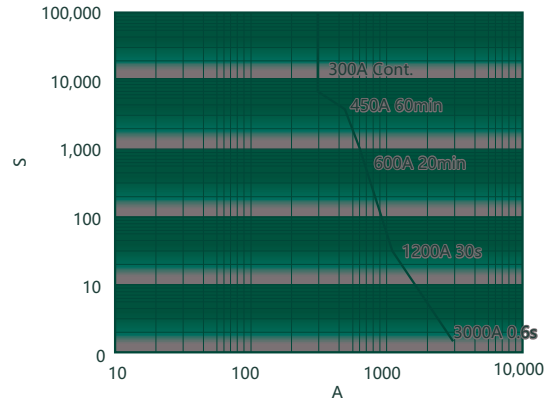

0.6S 5.4S

85°C, 100mm²



使用注意事项 Precautions for use

1 9N·m~11N·m。 M5 3N·m~4N·m

M6螺钉	9N·m~11N·m	Ø6.0~Ø6.5mm	5mm	M5螺钉	3N·m~4N·m
------	------------	-------------	-----	------	-----------

2 100mm²
3 0.2s 0.2s
4
5 3mm



声明/Statement:

1
2